





Technical specifications

capacity	2500 kg
voltage	230 V
engine power	2,2 kw
spanningsregeling	24V
min. take-up height	90 mm
maximum lifting height	2040 mm
range of rear lifting arms	500 - 661 mm
range of front lifting arm	s560 - 863 mm
height of the column	2600 mm
weight	710 kg
oil tank capacity	10 ltr



< including height adapters



< easy to move (mobile)

All Falco's truck bridges comply with the NEN-EN1493 safety standard and are supplied with a Dutch-language manual including maintenance protocol and CE certificate 2006/42/EC.





1-COLUMN LIFT 2500kg

Model: VL25F1

Mobile single-column lifting bridge




The thoughtful design of Falco bridges saves you time and effort. The focus is on ease of use and an efficient work flow. The different models are developed for various applications.

This Falco Sollevatori single-column lift bridge is ideal for professional use. Thanks to its stable and solid design, it can easily be placed on a straight surface and no assembly is required due to its solid construction.

General properties

- min. lifting height of 90 mm
- automatic support arm locking
- telescopic lifting arms
- automatic locking
- cover inside column
- transparent oil reservoir including oil deadman's handle for raising and level
- robust column made of rolled steel
- height adjustable support pads with double thread
- hydraulic cylinder, use of compressor / compressed air not necessary
- foot protection
- lowering
- stop when highest position is reached

Size overview

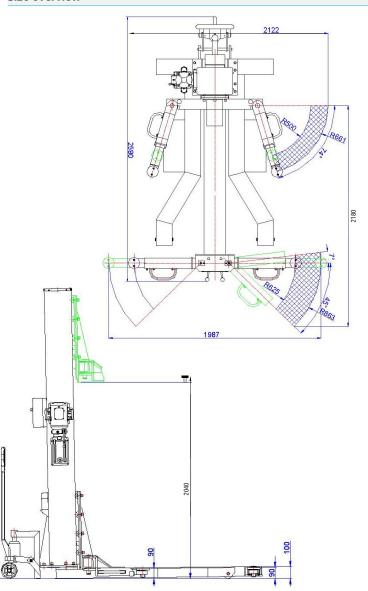

www.falco-sollevatori.com datasheet-V012020